


700w Series Electric Branders

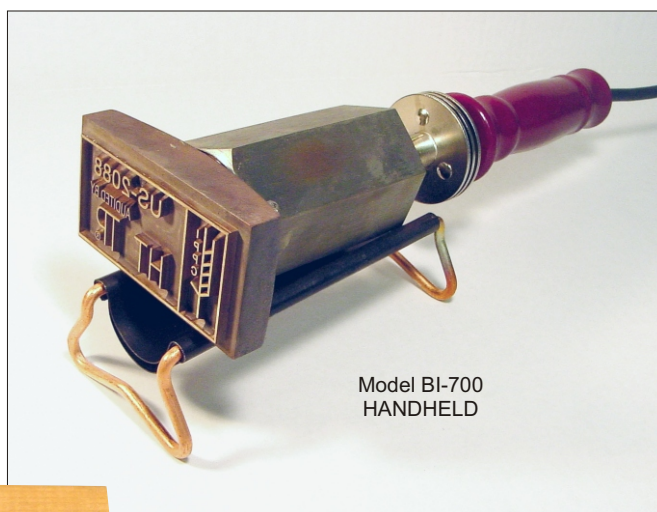

Interchangeable Die Blanks	
700-BDS	3.5" x 3.5"
700-BDR	3" round
700-BDO	1.5" x 6"
700-2.5x5	2.5" x 5"

TOOL SPECIFICATIONS			
Model DP-700 Drill Press		Model BI-700 Handheld	
Watts	700	Watts	700
Voltage	120 or 240 VAC (specify)	Voltage	120 or 240 VAC (specify)
Power Cord	3-Conductor, 5 ft.	Power Cord	3-Conductor, 5 ft.
Shank	1/2" dia. x 7/8" long	Handle	Turned Hardwood
Weight	8.5 lbs.	Weight	5.5 lbs.
Length	10.5" overall	Length	12" overall
Max Temperature	1200° F (approx.)	Max Temperature	1200° F (approx.)
Production	6 brands/minute	Production	6 brands/minute

TC-877 TEMPERATURE REGULATOR

Recommended for production branding. Maintains even branding temperature for more uniform brands. Also, prolongs the life of the heater by allowing operator to reduce heat buildup while brander is idle. Unit plugs directly into power supply and has 9 foot cordset. Brander plugs into female receptacle in the temperature regulator.

USE, CARE AND SAFETY

Observe all standard electrical safety procedures. A Ground Fault Interrupter is necessary for outdoor use. Extension Cord: 16 gauge three-conductor outdoor extension cord. Never leave brander unattended or near combustible material while hot. Disconnect when not in use or lower the temperature regulator while idle between uses.

Operation: Allow 20 - 30 minutes for brander to reach branding temperature (800°-1000° F). Press brander gently against surface and apply light pressure. Two to three seconds will produce a legible and permanent mark. Harder woods take longer than softer woods.